

# Steel Interior Door "Teckentrup Object"



## Text example

Compile and tender according to requirements.  
Please refer to Technical Data below for respective details.  
Updated 01.01.2011

Position	No. of pieces	Item	Unit price €	Total price €
		Door element "Teckentrup Object" can be used DIN right or DIN left. Door leaf made of hot-dip galvanized thin metal sheet, 40 mm thick, rebated on 3 sides. Tubular core bonded with the door shells over the entire surface. Galvanized and prime coated frame with 3-sided seal. Tumbler lock (Bb)/profile cylinder lock. Black round handle set "Teckentrup Object" or equivalent.		



## Technical data

<b>Product:</b>	<b>Interior door "Teckentrup Object"</b> Climate class III Stress group S
<b>Dimensions:</b>	Width: 625 – 1250 mm Height: 1875 – 2250 mm
<b>Type of handling:</b>	DIN right or DIN left
<b>Door leaf:</b>	Rebated on 3 sides made of hot-dip galvanized thin metal sheet (thick rebate) Insulation: Tubular core bonded with the door shells over the entire surface Door leaf thickness: 40 mm
<b>Frame:</b>	Frame element galvanized and powder coated, traffic white similar to RAL 9016, with 3-sided seal, welded-on wall anchor plugs
<b>Surface:</b>	<ul style="list-style-type: none"> <li>Galvanized door leaf or galvanized/powder coated, similar to RAL 9016 (traffic white),</li> <li>Galvanized and powder coated in: sepia brown, moss green, reed green pigeon blue, carmine and pure white</li> <li>Wood designs: light oak, white ash, beech natural, classic oak and cherry design</li> </ul>
<b>Fittings:</b>	<ul style="list-style-type: none"> <li>3-piece hinges, V8026 (pair)</li> <li>Lock prepared for profile cylinder with Lever/knob and tumbler insert (Bb)</li> <li>Black round handle set</li> </ul>
<b>Special equipment:</b>	<ul style="list-style-type: none"> <li>Bathroom lock / WC lock</li> <li>Profile cylinder with 3 keys</li> <li>Spyhole without viewer</li> <li>Spyhole with micro door viewer</li> <li>Letter box with flap Letter box cover</li> <li>Aluminium ventilation grille/Steel transformer grille</li> <li>Retractable bottom seal</li> <li>Door leaf prepared for rose escutcheon</li> <li>Door leaf prepared for top door closer</li> <li>Top door closer</li> <li>Frame without floor recess</li> <li>Full tubular core/Multi-layer tubular core on request</li> <li>RAL of your choice</li> </ul>

## Glazing:

Door leaf	Glazing strip version	Glazing
Galvanized	- With E6 anodized LM strips (natural anodized) - Round glazing, Ø 300 (stainless steel glass-holding strip)	Wire patterned glass up to 6 mm
Galvanized and powder coated traffic white	- With E6 anodized LM strips (natural anodized) - Round glazing, Ø 300 (stainless steel glass-holding strip)	Wire patterned glass up to 6 mm
Colour	- With E6 anodized LM strips (natural anodized) - Round glazing, Ø 300 (stainless steel glass-holding strip)	Wire patterned glass up to 6 mm
Wood designs	- With E6 anodized LM strips (natural anodized)	Wire patterned glass up to 6 mm

## Standard sizes:

Ordering dimensions/ Modular dimensions W x H	Pane size L1 W x H	Pane size L2 W x H	Pane size L3 W x H
625 x 2000	270 x 385	270 x 985	270 x 1235
750 x 1875	395 x 385	395 x 985	395 x 1235
750 x 2000	395 x 385	395 x 985	395 x 1360
750 x 2125	395 x 385	395 x 985	395 x 1485
875 x 1875	520 x 385	520 x 985	520 x 1235
875 x 2000	520 x 385	520 x 985	520 x 1360
875 x 2125	520 x 385	520 x 985	520 x 1485
1000 x 1875	645 x 385	645 x 985	645 x 1235
1000 x 2000	645 x 385	645 x 985	645 x 1360
1000 x 2125	645 x 385	645 x 985	645 x 1485

**Special sizes:** From 625 x 2000 mm to 1250 x 2250 mm




Special equipment (only for full leaf):

- ♦ **Sound insulation in acc. with DIN EN 20140/717 Part 1**  
**RW 25dB with retractable bottom seal**

**Interior door "Teckentrup Object" double leaf**  
Dimensions 1500 x 1875 mm to 2500 x 2250 mm

# Steel Interior Door "Teckentrup Objekt"

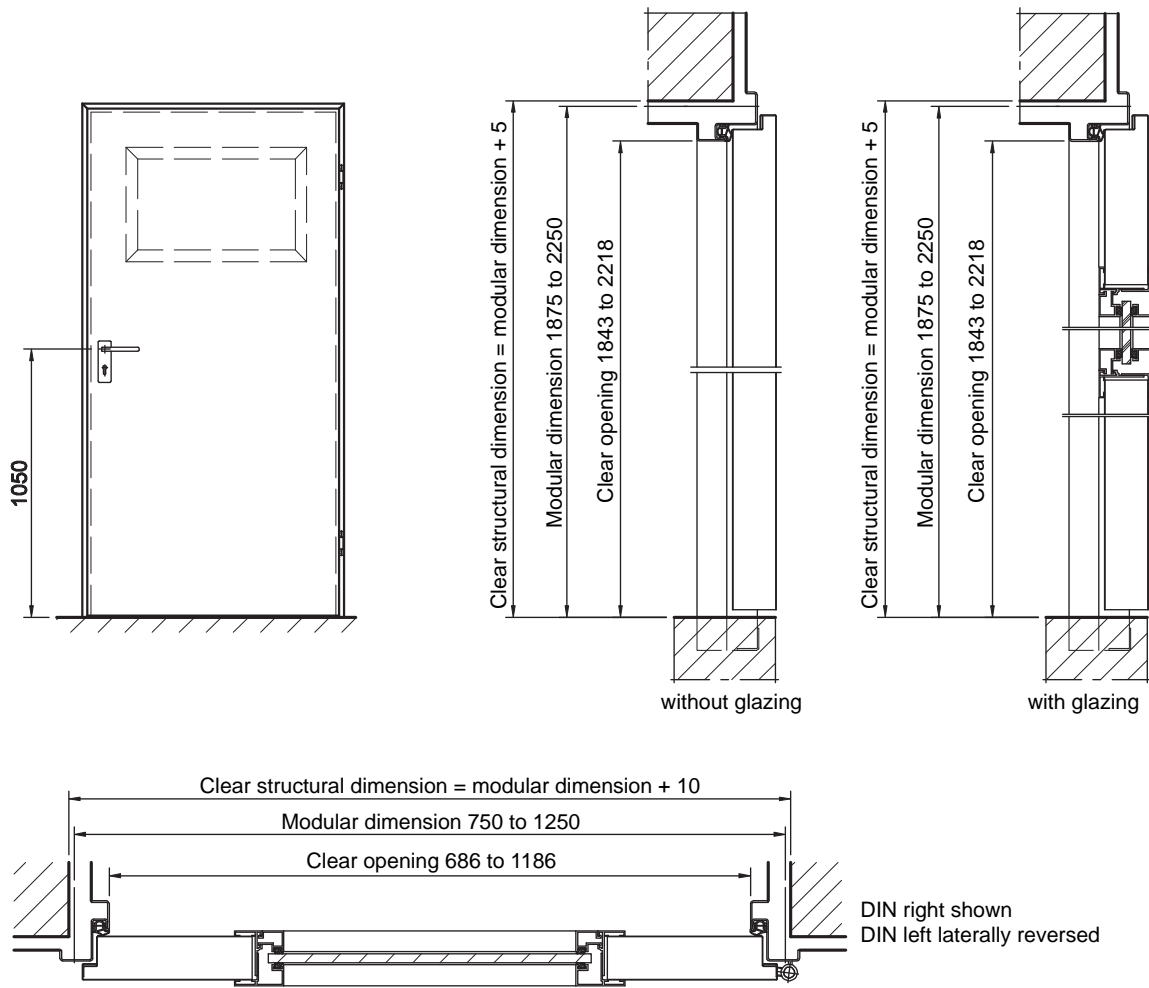

## Floor connections:

Image 1: without floor recess  
Image 2: With bottom /seal



## Installation in masonry/ concrete walls

