



El₂30-C2-S_a „Teckentrup 62 FST“ Fire-resistant sliding steel door 2lvs.



Optionally with wicket door, optionally with glazing

Text example:

Fire-proof sliding steel door El₂30-C2-S_a „Teckentrup 62 FST“ tested in accordance to EN 1634-1, for indoor use. Double-leaf door opening to the left or right. Galvanized door leaf, 62 mm thick (element design). With 3-sided door seal, galvanized (S_a). Door suspension consisting of tubular guide rail with double twin running gears. Automatic closing of the door due to counterweights in the protective box.

„Teckentrup 62 FST“ (classification with CE label acc. to EN 16034 / EN 13241) or equivalent.

(Compile and tender according to requirements. Please refer to technical data below for respective details. Updated 01.06.2024)

Technical data

El ₂ 30-C2-S _a „Teckentrup 62 FST“ materialgroup KB / Fire protection closure for indoor use classification with CE label according to EN 16034 / EN 13241		Wicket door
Approved wall types	Guide rail area: <ul style="list-style-type: none"> ▪ Concrete min. 140 mm ▪ Masonry min. 175 mm ▪ Covered steel beams F60-A (EI 60) Lateral walls: <ul style="list-style-type: none"> ▪ Concrete min. 140 mm ▪ Masonry min. 175 mm ▪ Aerated concrete for reinforced autoclaved aerated concrete slabs min. 175 mm ▪ Covered steel beams F60-A (EI 60) 	Between two door leaf elements <ul style="list-style-type: none"> ▪ Door leaf: double-skinned, rebated on 3-sides, without threshold. Opening to both sides possible. Clear dimensions of door (see pricing table): - Standard 1: 750 x 1800 mm - Standard 2: 1005 x 2010 mm - Standard 3: 1200 x 2100 mm <ul style="list-style-type: none"> ▪ Insulation: Mineral fibre and gypsum boards ▪ Sheet thickness: 1,0 mm ▪ Door leaf thickness: 62 mm ▪ Fitting: - 2 pieces of internal 3D hinges Expected from 3th quarter 2023 (standard) = Opening side Mounting side = overlying VN hinge Opening side reveal side = inner hinge <ul style="list-style-type: none"> - Mortice lock with latch lever - Prepared for profile cylinder, special handle set, black - Slide rail door closer according to DIN EN 1154 <ul style="list-style-type: none"> ▪ Special equipment: - Profile cylinder 30,5 + 40,5 mm - Blind cylinder 30,5 + 40,5 mm - Panic lock
Approved dimensions	Clear width: 1000 - 8500 mm (> on request) Clear height: 1500 - 6000 mm (> on request)	Glazing For door leaf and wicket door: Fire-resistant glass with steel glass holding strip Special equipment <ul style="list-style-type: none"> ▪ Complete hold-open device consisting of: - ___ smoke detectors, number of smoke detectors according to national specifications. - 1 magnetic clamp - 1 mains rectifier 220/24 V ▪ 1 emergency release button - Acoustic alarm signal ▪ Complete electric drive (opener) ▪ Free-wheel function ▪ Mortice hook lock Profile cylinder 33 + 33 mm ▪ Recessed handle without push handle ▪ Support inlet side ▪ Ceiling mounting without lintel
Installation	Lintel mounting or ceiling mounting, optional direct/ suspended ceiling mounting	
Opening direction	Door opens to the left or right	# Different appearance of hot-dip galvanized surfaces! The surface of galvanized sheet can have different optics, which is no reason for rejection (e.g. dark or light grey parts, gloss or matt). DIN EN ISO 1461 is the standard for galvanizing.
Door leaf	Door leaf consisting of individual elements (number of elements acc. to opening width) Insulation: Mineral fibre and gypsum-boards Sheet thickness: 1,0 mm Element weight: approx. 28 kg/m ² Floor seal: threshold seal (only with S ₂₀₀)	
Door leaf thickness	62 mm	
Door seal	<ul style="list-style-type: none"> ▪ Frame profiles galvanized, 1,0 mm thick / ▪ Door seal: 3-sided threshold seal ▪ Guiding shoe + guide rollers (lower door guide) 	
Weight box	<ul style="list-style-type: none"> ▪ Weight box with counterweights (behind the inlet side, radial damper mounting „rear“) ▪ Double leaf doors are always equipped with a redirection by weight per leaf 	
Surface	Door leaf (galvanized) and door seal # Special equipment: <ul style="list-style-type: none"> ▪ Prime coat (similar to RAL 9002) ▪ RAL of choice ▪ Version stainless steel on request 	
Fittings	<ul style="list-style-type: none"> ▪ Tubular guide rails with height adjustable double twin running gears on ball bearings ▪ 1 damping cylinder ▪ 1 radial damper ▪ 2 recessed handles / 2 push handles ▪ 1 magnetic clamp ▪ 1 guiding rail cover 	

Further qualifications
(Special equipment)




Smoke proof S₂₀₀ in accordance to EN-1634-3 (available with wicket door)
Version door in stainless steel + smoke protection not possible



EI₂30-C2-S_a „Teckentrup 62 FST“
Fire-resistant sliding steel door 2lvs.

For further installation details see related installation instruction

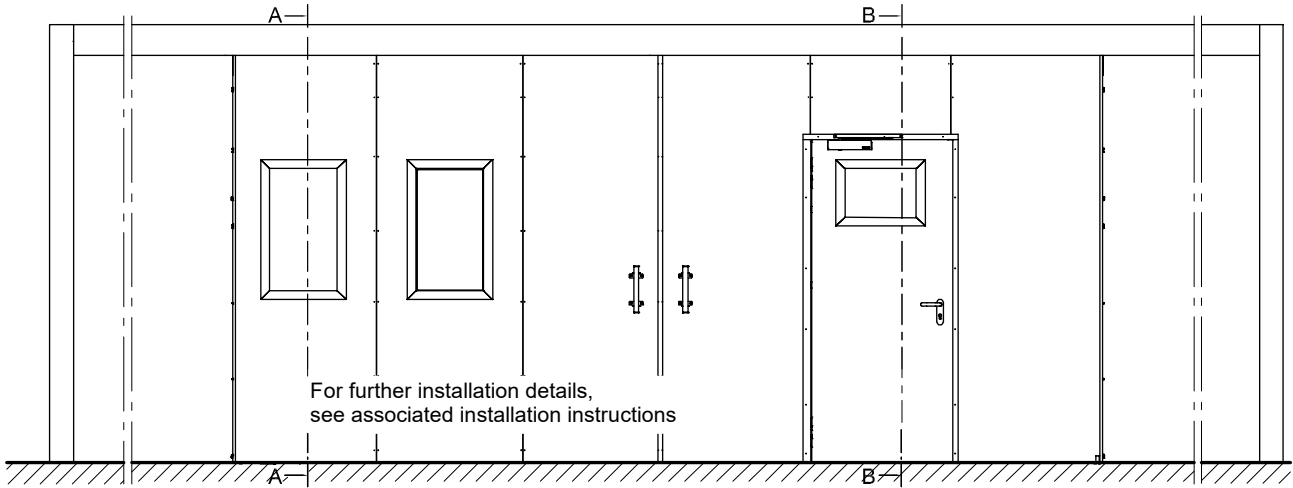

(aL) 200 mm up to clear width 5900 mm
(aL) 230 mm from 5901 mm

(aR) 200 mm for 2/4 stranded
(aR) 230 mm for 6 stranded

